


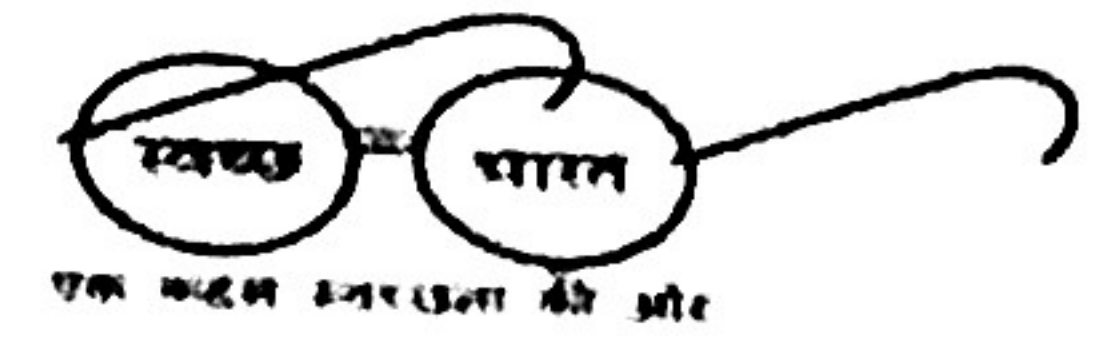

**OULGARET MUNICIPALITY
PUDUCHERRY – 5**

F.No.32-16/OM/AE-I/2020-21

Jawahar Nagar, the 4 . 1 . 2021

QUOTATION NOTICE


On behalf of the Oulgaret Municipal Council, sealed quotations are invited by the undersigned from eligible contractors enlisted with Public Works Department, Puducherry for the work of **“Proposed re-construction of a Culvert at 1st cross Dr. Radhakrishnan Nagar in Oulgaret Constituency”**.

Sl. No.	Item Code No.	Description of Items	Quantity	Rate (Rs.)	Units	Amount (Rs.)
1	2.8.1	Earthwork in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift upto 1.5m, including getting out the excavated soil and disposal of surplus excavated soil as directed , within a lead of 50m - all kinds of soil	2.00 Cum		Cum	
2	4.1.3	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - all work upto plith level - 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20mm nominal size)	3.00 Cum		Cum	
3	4.1.10	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - all work upto plith level - 1:5:10 (1 cement : 5 coarse sand : 10 graded stone aggregate 40mm nominal size)	4.00 Cum		Cum	
4	4.2.5	Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc. upto floor five level, excluding the cost of centering, shuttering and finishing -1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 20mm nominal size)	5.00 Cum		Cum	
5	4.3.2	Centring and shuttering including strutting propping etc. and removal of form work for - retaining walls, return walls, walls (any thickness) including attached pilasters, buttresses, plinth and string courses fillets, kerbs and steps etc.	31.50 Sqm		Sqm	
6	5.12	Providing , hoisting and fixing upto floor five level precast reinforced cement concrete work in string courses, bands, copings, bed plates, anchor blocks, plain window sills and the like, including the cost of required centering, shuttering but excluding cost of reinforcement , with 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20mm nominal size)	1.50 Sqm		Sqm	

Sl. No.	Item Code No.	Description of Items	Quantity	Rate (Rs.)	Units	Amount (Rs.)
7	11.3.1	Cement concrete flooring 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) finished with a floating coat of neat cement, including cement slurry, but excluding the cost of nosing of steps etc. complete - 40mm thick with 20mm nominal size stone aggregate	4.50 Sqm		Sqm	
8	13.16.1	6mm cement plaster of mix 1:3 (1 cement : 3 fine sand)	16.00 Sqm		Sqm	
9	15.2.2	Demolishing cement concrete manually / by mechanical means including disposal of material within 50 metres lead - Nominal concrete 1:4:8 or leaner mix (including equivalent design mix)	1.00 Cum		Cum	
10	15.3	Demolishing R.C.C work manually / by mechanical means including stacking of steel bars and disposal of unserviceable material within 50 metres lead	1.50 Cum		Cum	
11	15.7.4	Demolishing brick work manually / by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead - in cement mortar	5.00 Cum		Cum	
12	7.6D.M o	Steel reinforcement for R.C.C. works including bending, binding and placing in position - Thermo Mechanical Treated Bars (ISI brand approved make) Fe - 415 or more	0.20 Tonne		Tonne	
Total						

Terms and Conditions:

1. Quotations should be sealed and super scribed as **"Proposed re-construction of a Culvert at 1st cross Dr. Radhakrishnan Nagar in Oulgaret Constituency"**.
2. Quotation will be received by the undersigned upto 3.30 p.m. on 11-01-2021 and opened at 4.00 p.m. on the same day.
3. The Oulgaret Municipal Council reserves the right to reject any or all the quotations without assigning any reason thereof. The Oulgaret Municipality Council is competent to accept any quotations.
4. An EMD of Rs. 2,000/- in the form of Demand Draft obtained from any Nationalized Bank in favour of Commissioner, Oulgaret Municipality, Puducherry should be submitted with the quotation.
5. The EMD will be returned after satisfactory completion of work.
6. The work should be completed within 20 days from the date of receipt of order.
7. The rate quoted should be inclusive of all charges viz, GST, Taxes, Transporting, etc., complete. Payment will be made on completion of work in good and satisfactorily condition.
8. The rates quoted should be valid for 90 days from the date of opening of quotation.
9. No advance payment will be made on any account.

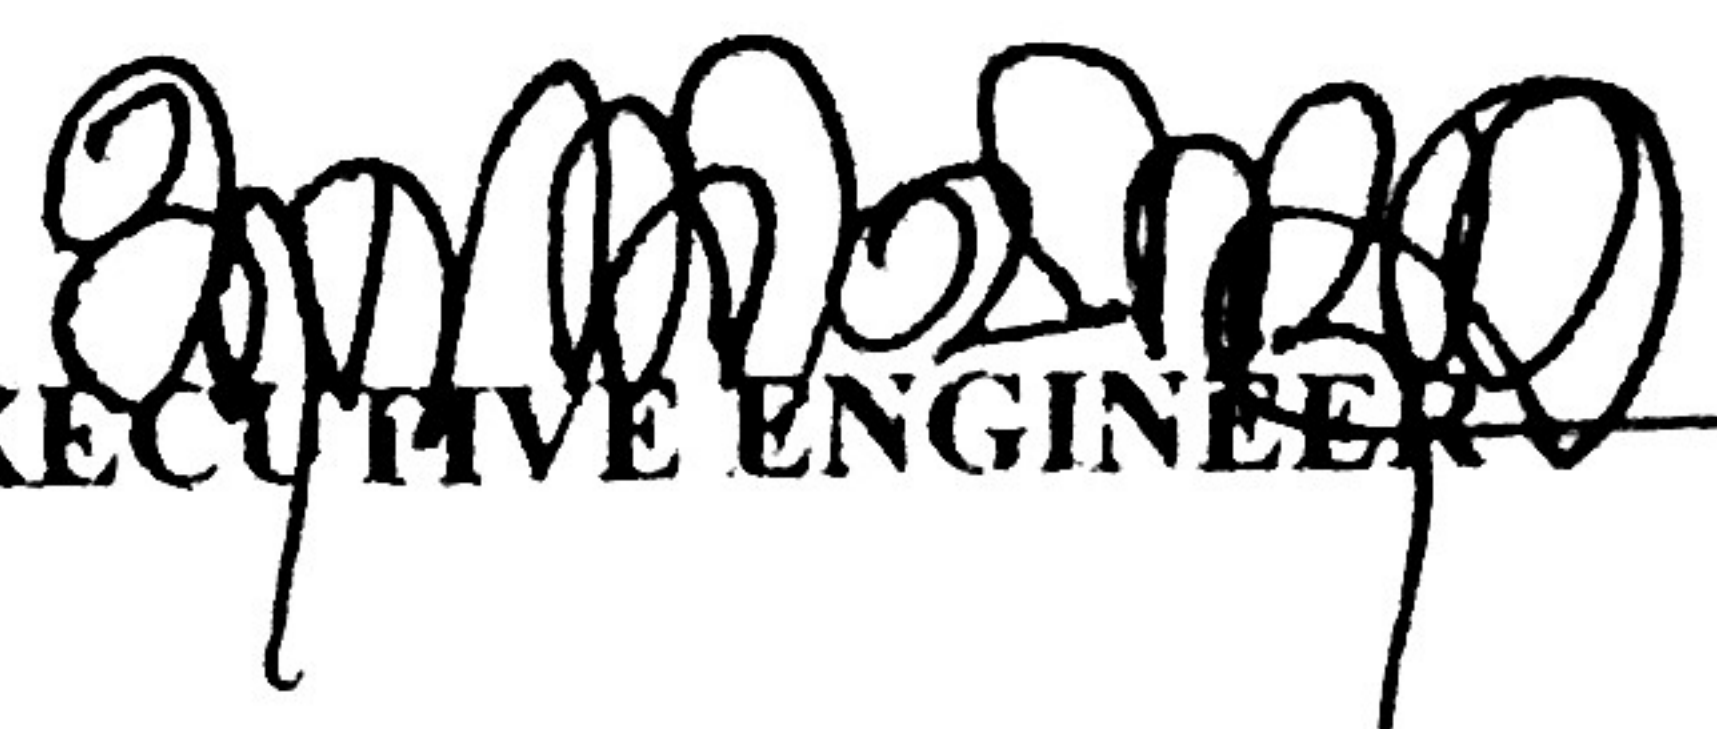
 EXECUTIVE ENGINEER

To
Notice Board.